


FÜLL- UND SIEGELMASCHINE FÜR MITTLERE LEISTUNG

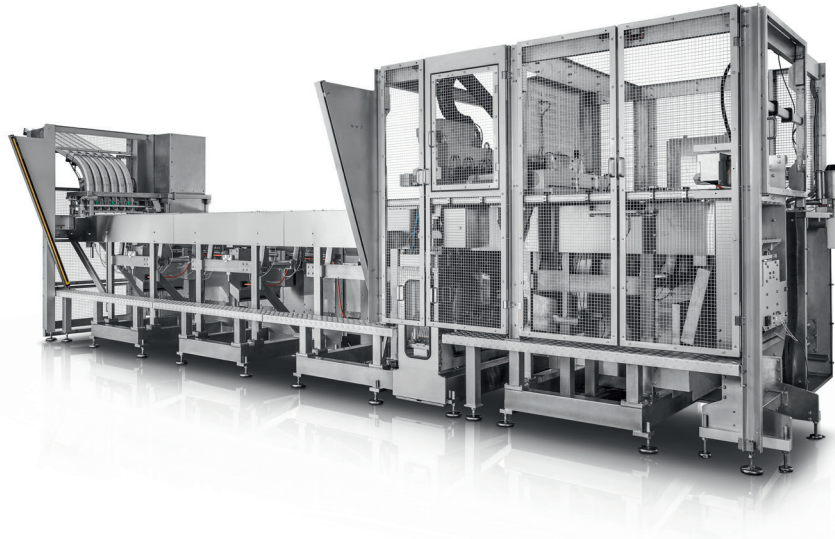

The Rychiger FS 800 fills and seals prefabricated portion packs of all kinds. The unique «Walking Beam» transport system with beam construction prevents product spills from being carried through the machine, can be wet cleaned and meets the most demanding hygienic standards. The FS 800 is of modular construction, can be configured in any order and is flexibly adaptable to just about any product, packing material and process requirements.

Sealing and Transport Module

- Heat sealing or ultrasonic technology
- Ultra-precise sealing station with closed force flow
- Servo-mechanically driven knee-lever sealing system
- Single tools with highly precise sealing pressure
- Individual temperature control of each sealing tool
- Automatic sealing beam lift system with swinging function for easy access to sealing tools
- «Walking Beam» transport system (beam construction)
- Robust modular design with servo-motor drive (king shaft)
- Overlapping movements positively controlled by cams for maximum process reliability

Punching and Sealing from Roll Stock

- Punching and sealing in a single step (One-Stroke technology)
- Various punching dies for aluminium and plastic foils
- Specialized Rychiger foil guide: 15-30% less material consumption compared with other systems

Sealing of Pre-Cut Lids

- Lid feed from magazine directly into sealing tool
- Lids vacuum fixed on sealing tool
- Absolute centred sealing of lid and container

Transport Module

- «Walking Beam» transport system (beam construction)
- Separation of process area and drives
- Mechanical drive coupled to sealing module (king shaft)
- Flexible integration of additional process functions

Container Destacking

- Versions with knife or sliding plates
- Manual or automatic loading to stacking magazines

Container Exit

- Exit slide
- Pick-and-Place system
- Option: Integrated reject-system, Printer (Inkjet, Laser)

Product Filler

- Liquids
- Pasty/highly pasty products
- Chunky products
- Powdered products

Controls/Operation

- Touch screen with process visualization
- Permanent monitoring of all relevant process parameters
- Control from Allen Bradley
- Other manufacturers on request

Optional Additional Functions


- Seamless integration of further product-specific functions over standardized interfaces, e.g. robotics, inspection and camera systems, third-party filler, check weigher, container inverter, ink jet, etc.

TECHNICAL DATA FS 800

Container Dimensions [mm]	Container Height [mm]*	Lanes	Cycles [/min]	Output [/min]	Output [/h]	Weight [kg]	Voltage	Compressed Air	Cooling Water
□55x55	70	8	50-55	440	26400	~ 9000	3x400 V/460 V 50 Hz/60 Hz 30-60kW	6bar ~10 l/min	3-5 l/min
□70x70	70	7	50-55	385	23100				
□90x90	70	6	50-55	330	19800				

* Sealing of pre-cut lids: container height 55 mm
 Technical data can vary depending on container dimensions and shapes, filling goods, material specifications and line configuration.

PROCESS (EXAMPLE)

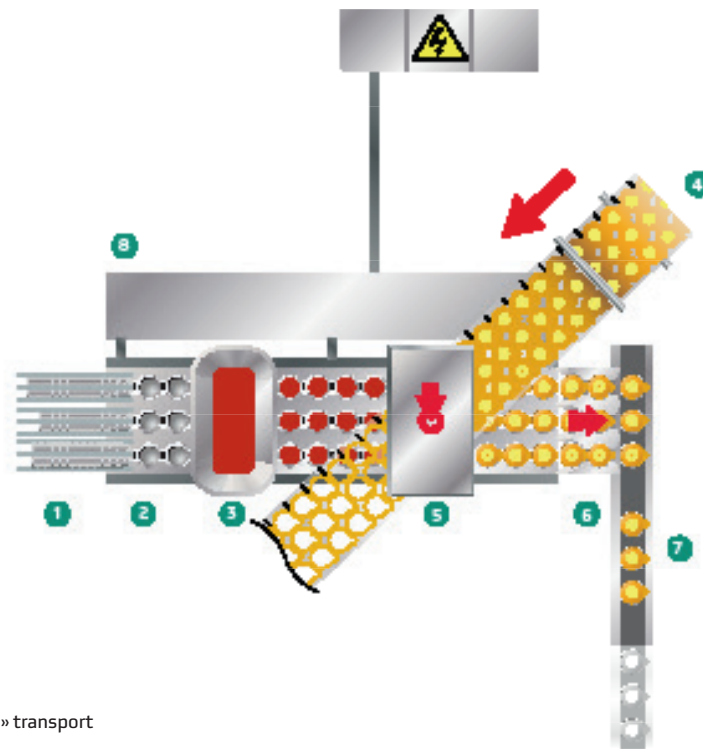

- 1 Container magazine
- 2 Destacker in «Walking Beam» transport system (beam construction)
- 3 Product filler with integrated container lift
- 4 Foil feed from roll stock
- 5 Punching and heat sealing station with integrated MAP (headspace gas flushing)
- 6 Exit slide
- 7 Discharge conveyor according to customer needs
- 8 Drives and components (separated from process area)



Rychiger AG

Alte Bernstrasse 135
 3613 Steffisburg
 Switzerland

T +41 (0)33 439 68 68
 F +41 (0)33 439 68 88
 rychiger@rychiger.com

www.rychiger.com

Rychiger NA

641 Industrial Drive, Unit C
 Cary, IL 60013
 USA

T +1 224 888 8952
 F +1 847 628 0708
 us.service@rychiger.com